

TOGGLE SWITCH

Features

- Power Switch conforms to safety standards for electrical equipment.
- Compact with a good space factor



Specifications

Item	Standard
Rating	10A 1250VAC / 15A 250VAC , UL1054
Contact Resistance	25mΩ max.(initial)
Dielectric Resistance	AC 1000V (50/60 Hz for 1 minute)
Insulation Resistance	100MΩ min (at 500 VDC)
Electrically Life	30,000 Cycle min
Mechanically Life	100,000 Cycle min

Product Selection

T- ☐ ☐ ☐
1 2 3

1.CONTACT TYPES

11: 2P ON-OFF	SPST
12: 3P ON-ON	SPDT
13: 3P ON-OFF-ON	SPDT
21: 4P ON-OFF	DPST
22: 6P ON-ON	DPDT
23: 6P ON-OFF-ON	DPDT

2. TERMINAL TYPES


A: SOLDER
B: SCREW
C: #250 QUICK CONNECT

3. RATING TYPES


_: 10A 250VAC
S: 15A 250VAC

Treminal Dimension


A:SOLDER TYPE



B: SCREW TYPE



C:#250 QUICK CONNECT TYPE



HIGHLY

E1

Design, specifications are subject to change without notice.

TOGGLE SWITCH

Dimensions

Unit: mm

Item

Operating Characteristics

Dimensions

T-11




ON



OFF

2P SPST

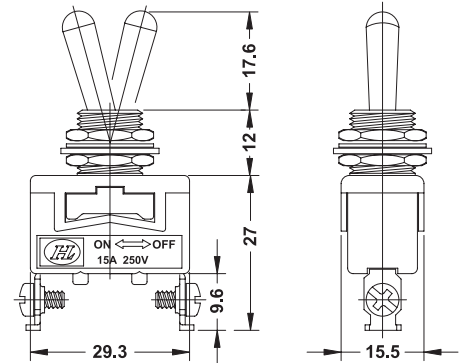

T-12




ON




ON

3P SPDT

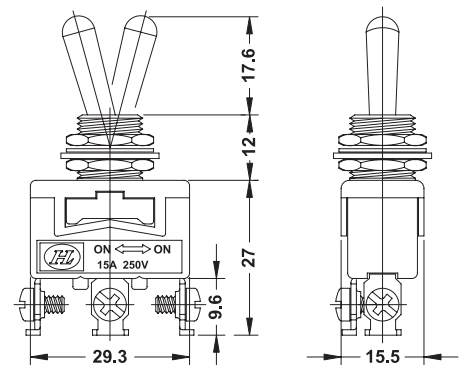

T-13



ON




OFF




ON

3P SPDT

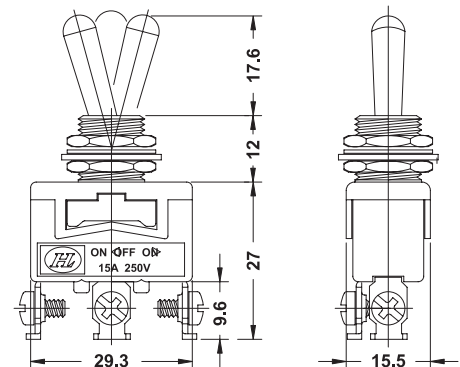

T-21




ON



OFF

4P DPST

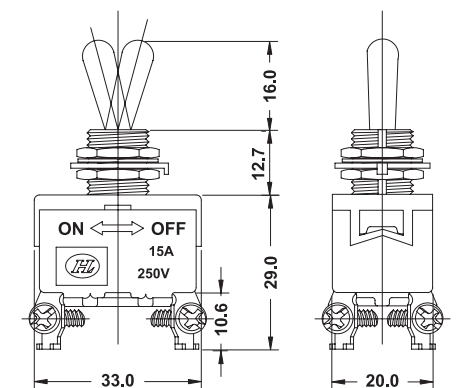

HIGHLY





E2

Design, specifications are subject to change without notice.

TOGGLE SWITCH

Dimensions

Unit: mm

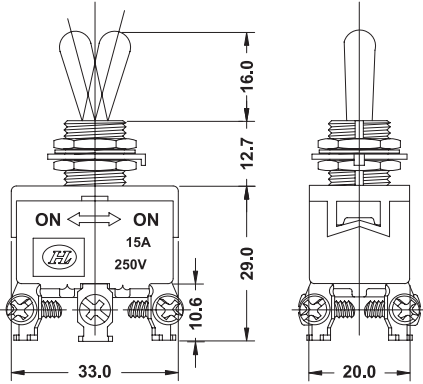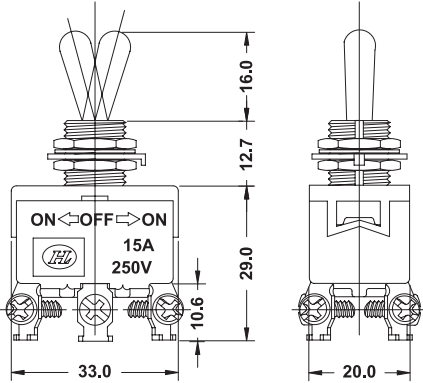Item	Operating Characteristics	Dimensions
T-22	 ON ← ON HIGHLY 15A 250VAC  ON ON 6P DPDT	
T-23	 ON ← OFF → ON HIGHLY 15A 250VAC  ON OFF ON 6P DPDT	
TR-1		