

Note: Please read this manual carefully before use B-328BT; please check for any special requirement or restriction about the use of Bluetooth wireless technology in your country

B-328BT Installation Guide

&

User Manual

Features and Functions:

- * Bluetooth car kit, compatible with all Bluetooth phones.
- * CVC technology to eliminate noise and restrain echo, enjoy clearly speaking.
- * Support line-in, USB & SD card.
- * Caller ID number show, support call answering & call rejecting, call transferring and last caller number re-dialing.
- * Bluetooth automatically connection.
- * Built-in Microphone.
- * Large 1.5 inch LCD display, support full frequency transmitting (87.5-108.0MHz)
- * Spring handle support all direction circumgrated.
- * EQ mode: Normal, Rock, Pop, Classical, Jazz;
- * Circulation mode: All, Single, Folder, Random;
- * RDS function display the caller ID number and the name of song on car radio.

Technical Specifications:

- Excellent sound quality with full duplex communication
DSP (Digital Signal Processing) Technology for echo cancellation and background noise reduction
- Supported BT Profiles:
Bluetooth frequency range:
FM transmitting range:
Operating voltage range:
Charger Output Rating:
Microphone:
Support:
Display:
Audio In:
- Bluetooth 2.1 +EDR solution (HSP 1.0, HFP 1.5)
2.402 ~ 2.480GHz
87.5~108.0MHz
DC 12V~24V (car lighter socket)
5V DC, 1.5A
Noise Cancelling
SD, USB, LINE-IN
1.5 inch LCD display
2.5mm:

Installation


1. Insert the **B-328** into the socket of car lighter.
2. Adjust the transmitting frequency of the **B-328** to correspond channel between FM87.5~108.0MHz
3. Set the car fm channel the same with **B-328** channel, then the **B-328** could play music of U-disk or SD/MMC, or other audio source through line-in.

Bluetooth function operations

Pairing with a Bluetooth enabled cell phone

1. With the **B-328** ON, long press the Pairing button on the front panel for 8 seconds until the Blue LED flashing.
2. The Bluetooth cell phone will search for the nearby Bluetooth devices, the cell phone will display "**B-328**" in the list of Bluetooth devices, if you are using a "dongle" type Bluetooth adaptor, follow the manufacturer's instructions for that device.
3. Select "**B-328**" to add this Bluetooth device into the list of paired devices.
4. Enter in the PIN Code "0000" and your mobile phone will show that pairing is completed.
5. If pairing successful, the Blue LED will quick flash 2 times every 1 second.
(If pairing failed, the Blue LED will flash once every 3 seconds)

Operations on the Panel

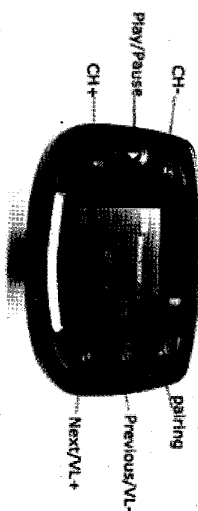

Basic Operations:

- Answer the call:** Short press the **CH+** key to answer the call when someone calling.
- Reject the call:** Long press the **CH+** key to reject the call when someone calling.
- Call transfer:** Long press the **CH+** key to transfer the call between the unit and your mobile phone when in talking.
- Last number re-dialing:** Long press the **CH+** key to re-dial the last caller number when Bluetooth connected.
- Turn on/ Turn off Bluetooth:** Press and hold the pairing button for 6 seconds to turn on or turn off the Bluetooth.
- Play/Pause:** Short press the **Play/Pause** key to play the MP3/WMA (optional) file. To pause during playback, press the **Play/Pause** key. To resume, press it again.
- Previous/Next:** Short press the **Previous/Next** key to play the previous track or press the **Next** key to play the next track.
- Switch Channel:** Press the "+" or "-" key to switch the open channels. When you switch to a certain channel, the frequency is indicated on the display.
- Note:** There are 206 preset channels: 87.5 MHz ~ 108.0MHz
- Adjust Volume :** Long press the **Volume+** key to increase volume, or long press the **Volume-** key to decrease volume.

Operations on the remote control

